



Single Head 4K30

Real-time KVM access via 1G IP networks  
to Draco tera matrix systems

Compatible to existing Draco tera installs  
via Draco tera IP Gateway

Local feed through port to attach a PC

Compatible with all  
Draco vario chassis solutions

## PRODUCT INFORMATION

### Access flexibility

The Draco vario IP Gateway consoles provide seamless integration into Draco tera KVM matrix applications via IP network infrastructure. Instead of using dedicated Cat X or fiber optic links, the new IP based consoles make use of Gigabit Ethernet topologies, allowing for more flexibility accessing via Draco tera KVM matrix switches attached target computers. KVM connections with up to 4K30 resolutions single head are supported across 1G IP connections in real-time.


### Network simplicity due to hybrid setup

Since the core KVM matrix system still is based on easy to setup proprietary connectivity, it is way easier to provide individual consoles flexible IP access. Requirements on the network infrastructure are a sufficient bandwidth and low latency for maintaining the highest performance. Complexity such as Multicast, IGMP, Jumbo Frames are not to worry about, thanks to the hybrid KVM architecture.

To integrate a Draco vario IP Gateway CON into an already operational KVM system, users only need a Draco tera enterprise or Draco tera flex matrix switching system with an IP Gateway interface and 1G/10G network infrastructure.

This hybrid KVM setup with its mix of proprietary and IP connected endpoints offers completely new levels of flexibility and connectivity.

## CONSOLE ACCESS VIA IP TO DRACO TERA MATRICES

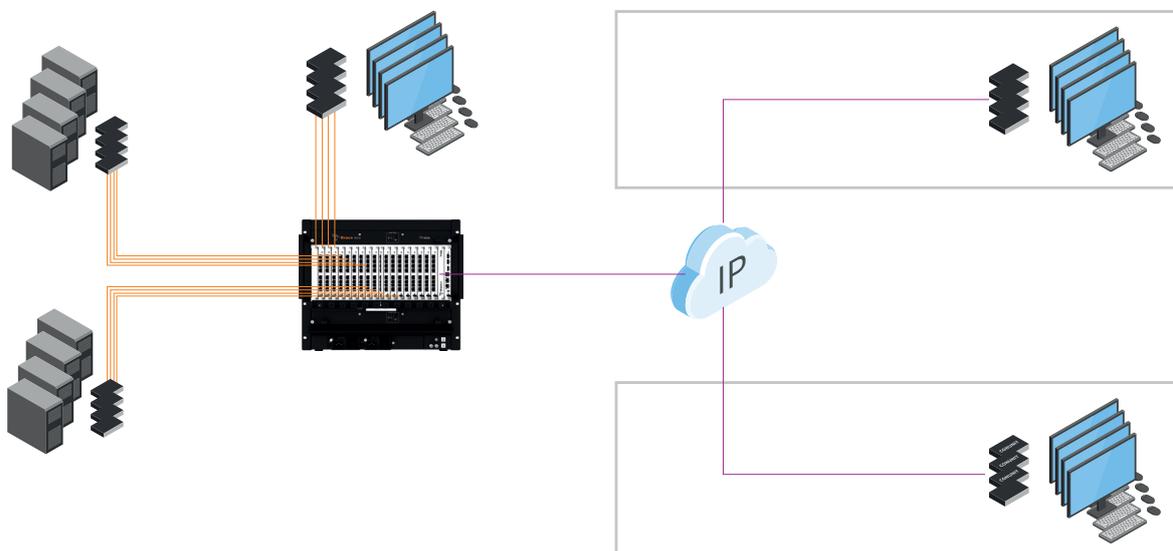

TECHNICAL DATA	
Input	HDMI up to 4K30
Output	HDMI up to 4K30
Audio (embedded)	Stereo Linear Pulse Code Modulation (LPCM), DTS, DTS-HD (5.1), Dolby Digital, Dolby Digital Plus (5.1)
Maximum Resolution	4K30/2K60
Keyboard / Mouse	USB-HID
Optional Interfaces	-
Maximum transmission range to network switch:	Cat X: 140 m Single Mode Fiber: 10 km
Power supply	Power supply via the used Draco vario chassis*
Current Draw	Max. 1.990 mA per extender module (power input via the used Draco vario chassis)*
Link Data Rate	1G
Dimensions	20 x 129 x 143 mm
Weight	Approx. 130 g
Chassis / Mounting Accessories	Suitable Draco vario chassis and mounting accessories under the following link: <a href="https://www.ihse.com/chassis-accessoires/">https://www.ihse.com/chassis-accessoires/</a>
Updatable	Via Onboard Flash

\*For detailed information refer to the user manual.

## ORDER NUMBERS

DRACO VARIO IP GATEWAY CON SERIES 481		PART NO.
Draco vario IP Gateway CON module HDMI 4K30, Cat X 1G		IP-R481-BUHCL
Draco vario IP Gateway CON module HDMI 4K30, Fiber LC SM 1G		IP-R481-BUHSL
Draco vario IP Gateway CON module HDMI 4K30, Cat X 1G, redundant		IP-R481-BUHCLR
Draco vario IP Gateway CON module HDMI 4K30, Fiber LC SM 1G, redundant		IP-R481-BUHSLR



IHSE offers an online tool for free configuration of your KVM projects. It enables documentation and verification of individual extenders up to complete matrix applications. All KVM switches and extenders are available for selection, including add-on modules, chassis variants and special accessories: [dsd.ihse.com](http://dsd.ihse.com)